




Design of Corbel as per ACI 318-11 Chapter 11

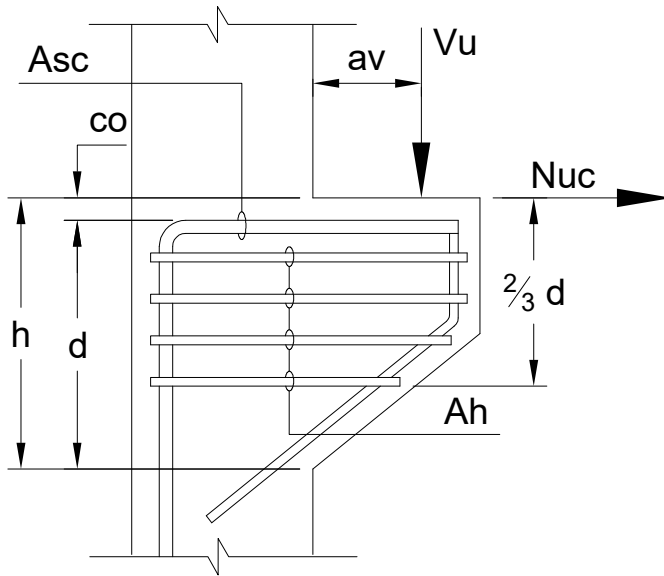

System

Corbel Width, b=		14.0 in
Corbel Height, h=		12.0 in
Concrete Cover, co=		1.0 in
Corbel Depth, d=	$h - co = 12.0 - 1.0$	= 11.0 in
Distance from Column Face to Vertical Load, a_v =		3.0 in

Load

Ultimate Vertical Load, V_u =		88.8 kips
Ultimate Horizontal Load, N_{uc} =		32.0 kips

Material Properties

Concrete Strength, f'_c =		5000 psi
Yield Strength of Reinforcement, f_y =		60000 psi
Shear Strength Reduction Factor (According to Cl.9.3.2 of ACI318), Φ =		0.75
Modification Factor for Lightweight Concrete, λ =		1.00
Friction Factor (According to Cl.11.6.4.3 of ACI318), $\mu = 1.4 * \lambda$		= 1.40

Check Vertical Load Capacity

V_{n1} =	$0.2 * f'_c * b * d / 1000$	= 154.0 Kips
V_{n2} =	$(480 + 0.08 * f'_c) * b * d / 1000$	= 135.5 Kips
V_{n3} =	$1600 * b * d / 1000$	= 246.4 Kips
Nominal Vertical Capacity (According to Cl.11.8.3.2.1 of ACI318),		
ΦV_n =	$\Phi * \text{MIN}(V_{n1}; V_{n2}; V_{n3})$	= 101.6 Kips
Vertical Load Capacity=	$\text{IF}(V_u > \Phi V_n; \text{"Not Pass"}; \text{"Pass"})$	= Pass

**Determine Shear Friction Reinforcement (A_{vf})**

Required Area of Reinforcement for Shear Friction (According to Cl.11.6.4.1 of ACI318),

$$A_{vf} = V_u \times 1000 / (\Phi \times f_y \times \mu) = 1.41 \text{ in}^2$$

Determine Direct Tension Reinforcement (A_n)

$$\text{Minimum Horizontal Force on Corbel, Nuc}_{min} = 0.2 \times V_u = 17.8 \text{ Kips}$$

$$\text{Horizontal Force on Corbel, Nuc}_{act} = \text{MAX}(\text{Nuc}; \text{Nuc}_{min}) = 32.0 \text{ kips}$$

Required Area of Reinforcement for Direct Tension (According to Cl.11.8.3.1 of ACI318),

$$A_n = \text{Nuc}_{act} \times 1000 / ((\Phi) \times f_y) = 0.71 \text{ in}^2$$

Determine Flexural Reinforcement (A_f)

$$M_u = V_u \times a_v + \text{Nuc}_{act} \times (h-d) = 298.4 \text{ kip}\cdot\text{in}$$

Required Area of Reinforcement for Flexural (According to Cl.11.8.3.3 of ACI318),

$$A_f = M_u \times 1000 / (\Phi \times f_y \times 0.9 \times d) = 0.67 \text{ in}^2$$

Determine Primary Tension Reinforcement (A_{sc})

Required Area of Reinforcement for Primary Tension (According to Cl.11.8.3.5 of ACI318),

$$A_{sc} = \text{MAX}((2/3 \times A_{vf}) + A_n; A_f + A_n) = 1.65 \text{ in}^2$$

Minimum Area of Reinforcement for Primary Tension (According to Cl.11.8.5 of ACI318),

$$A_{sc_min} = 0.04 \times f_c' / f_y \times b \times d = 0.51 \text{ in}^2$$

$$A_{sc_Req} = \text{MAX}(A_{sc}; A_{sc_min}) = 1.65 \text{ in}^2$$

$$\text{Provided Reinforcement, Bar} = \text{SEL}(\text{"ACI/Bar"}; \text{Bar};) = \text{No.9}$$

$$\text{Provided Area of Bar Reinforcement, } A_{sb} = \text{TAB}(\text{"ACI/Bar"}; \text{Asb}; \text{Bar}=\text{Bar}) = 1.00 \text{ in}^2$$

$$\text{Number of Provided Bars, } n = 2$$

$$\text{Provided Area of Reinforcement, } A_{sc_Prov} = n \times A_{sb} = 2.00 \text{ in}^2$$

$$\text{Check Validity} = \text{IF}(A_{sc_Prov} \geq A_{sc_Req}; \text{"Valid"}; \text{"Invalid"}) = \text{Valid}$$

Determine Horizontal Reinforcement (A_h)

Required Area of Reinforcement for Horizontal Shear (According to Cl.11.8.4 of ACI318),

$$A_{h_Req} = 0.5 \times (A_{sc_Prov} - A_n) = 0.65 \text{ in}^2$$

$$\text{Provided Reinforcement, Bar} = \text{SEL}(\text{"ACI/Bar"}; \text{Bar};) = \text{No.3}$$

$$\text{Provided Area of Bar Reinforcement, } A_{sb} = \text{TAB}(\text{"ACI/Bar"}; \text{Asb}; \text{Bar}=\text{Bar}) = 0.11 \text{ in}^2$$

$$\text{Number of Provided Bars, } n = 6$$

$$\text{Provided Area of Reinforcement, } A_{h_Prov} = n \times A_{sb} = 0.66 \text{ in}^2$$

$$\text{Check Validity} = \text{IF}(A_{h_Prov} \geq A_{h_Req}; \text{"Valid"}; \text{"Invalid"}) = \text{Valid}$$

Distribute in two-thirds of Effective Corbel Depth adjacent to A_{sc}

Design Summary

$$\text{Area of Reinforcement for Primary Tension } A_{sc} = A_{sc_Prov} = 2.00 \text{ in}^2$$



Area of Reinforcement for Horizontal Shear, $A_h = A_{h_Prov} = 0.66 \text{ in}^2$

Distribute in two-thirds of Effective Corbel Depth adjacent to A_{sc}